

Packaging - Specification container for transport


SCHÜTZ

**ECOBULK RMX 1250 UN / DN150 with two plugs /
scr. butterfly-valve, PP-g. / 2 label plates /
Steel-framepallet**

**SCHÜTZ GmbH & Co.KG&A
Schützstraße 12
D 56242 Selters / Germany**

**Date: 09.05.2014 / TE-KO / ck
Page 1 from 2**

Article - No.: 4007156

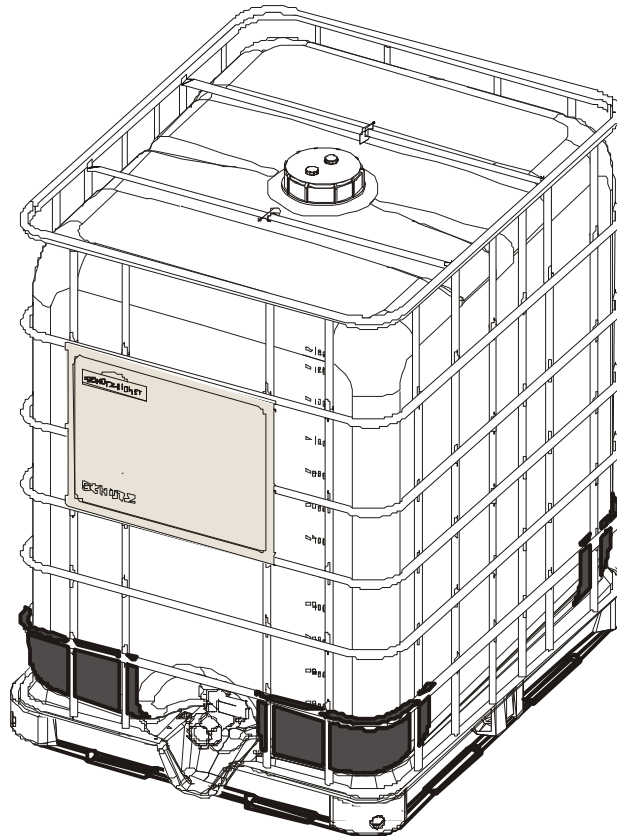

Technical data:

Nominal Capacity:	1250	Litre
Brimful Capacity:	1260	Litre
Length:	1200	mm
Width:	1000	mm
Height with pallet:	1350	mm
Filling opening:	150	mm
Discharge opening:	50	mm
Fork opening:	100	mm
Label plate:	2	piece
Corner Protector:	4	piece
Weight:	Inner container:	19,0 kg
	Total approx:	65,5 kg

Technical subjects to change, all dimensions approximately

Packaging - Specification

container for transport



**ECOBULK RMX 1250 UN / DN150 with two plugs /
scr. butterfly-valve, PP-g. / 2 label plates /
Steel-framepallet**

**SCHÜTZ GmbH & Co.KGaA
Schützstraße 12
D 56242 Selters / Germany**

**Date: 09.05.2014 / TE-KO / ck
Page 1 from 2**

Article - No.: 4007156

Construction:

Outer Container: Rectangular grid box made of tubular Steel material, with bottom plate, connected on top with tie-bar, label plate with Schütz-Ticket on front side, additional label plate on the back side.
Material: Grid / Bottom plate: Steel, galvanized
Corner Protector: 4 pieces made of PE-HD

Inner Container: Rectangular blow molded tank of high density polyethylene, with filling opening in the middle of the top section.
Discharge opening at the bottom of the front side.
Material: PE-HD, natural

Filling Opening: DN150 with external thread, closed with screw cap and gasket. With two plugs: One with G2-plug closed and one with G2-plug, vent and sealing-cap.
Material: Screw cap DN150: PE-HD, red
O-ring gasket: TPE
G2-plugs: PP
O-ring G2-plugs: EBA, natural
Vent: Silicone-FDA

Discharge Opening: Screwed butterfly-valve DN50 with red handle. Outlet sealed with PE-lined Alu-film. Valve closed with screw cap, PE-disk and flat-gasket. Outlet nozzle enclosed.
Material: Butterfly-valve housing: PE-HD, natural
Flap-gasket: PP
Flange-gasket: EPDM
Screw cap DN50: PE-HD, black
Flat-gasket screw cap: PE, foam
PE-disk: PE-HD, red
Outlet nozzle: PE-HD, natural

Pallet: Steel-framepallet (1000 x 1200 mm), 4-way entry
Material: Steel, galvanized

Heavy metals: Concentration level of heavy metals (Pb, Cd, Cr VI and Hg) in packaging does not exceed 100ppm

Delivery: Ready for filling

UN-Marking: UN 31 HA1 .../ BAM0420

Speciality: All parts which have contact with filling product are replaced by new once, for example inner tank, screw cap, valve and label plate.
Grid, pallet and the metal cladding may show marks from the prior use!

Technical subjects to change, all dimensions approximately